


LP7620

Floor Scale

※ Dimensions:

◆Unit (mm)

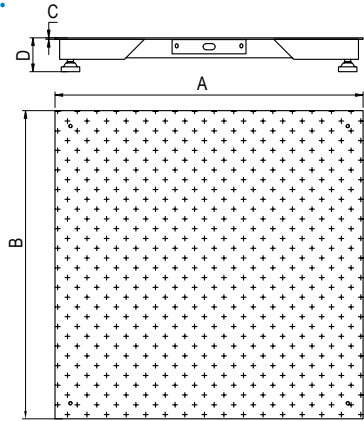


※ Technical Parameters

- ◆ Accuracy class: Ⅲ
- ◆ Display: 6-digit 20mm LED or 25mm LCD with backlight
- ◆ Work environment: -10° C ~+40° C , ≤ 85%RH
- ◆ Power Supply: AC110/220V 50/60Hz, Built-in battery DC4V/4Ah

※ Structural Features

- ◆ U shape steel structure
- ◆ Material: carbon steel or 304 stainless steel flat panel
- ◆ Carbon steel scales: Integral shot blasting or galvanizing
- ◆ All round shot 304 stainless steel
- ◆ 4 stainless steel load cell

※ Product Functions:

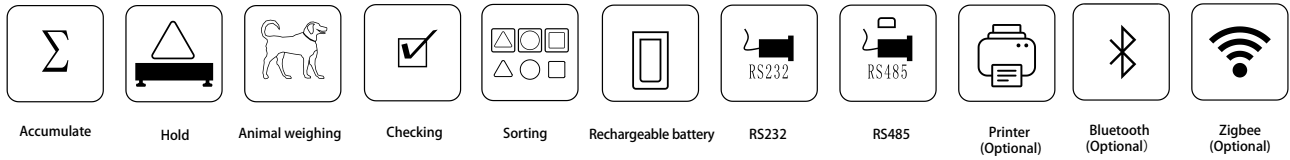

※ Various Scale:



Stainless steel Open type



Various Stands type

※ Types & Specifications :

Item No.	Capacity	A	B	C	D	Weight (kg)	Ctn size (m)
LP7620A-1010-1~3t	1~3t	1000	1000	6	110	65	1.03*1.03*0.08
LP7620A-1010-5t	5t	1000	1000	6	110	65	1.03*1.03*0.08
LP7620A-1012-1~3t	1~3t	1000	1200	6	110	80	1.03*1.23*0.08
LP7620A-1012-5t	5t	1000	1200	6	110	80	1.03*1.23*0.08
LP7620A-1212-1~3t	1~3t	1200	1200	6	110	100	1.23*1.23*0.08
LP7620A-1212-5t	5t	1200	1200	6	110	100	1.23*1.23*0.08
LP7620A-1215-1~3t	1~3t	1200	1500	6	110	125	1.23*1.53*0.08
LP7620A-1215-5t	5t	1200	1500	6	110	125	1.23*1.53*0.08
LP7620A-1515-1~3t	1~3t	1500	1500	6	110	150	1.53*1.53*0.08
LP7620A-1515-5t	5t	1500	1500	6	110	150	1.53*1.53*0.08
LP7620A-1520-1~3t	1~3t	1500	2000	6	110	195	1.53*2.03*0.09
LP7620A-1520-5t	5t	1500	2000	6	110	225	1.53*2.03*0.09
LP7620A-1520-10t	10t	1500	2000	8	135	300	1.53*2.03*0.12
LP7620A-1525-1~3t	1~3t	1500	2500	6	110	250	1.53*2.53*0.10
LP7620A-1525-5t	5t	1500	2500	6	110	285	1.53*2.53*0.10
LP7620A-1525-10t	10t	1500	2500	8	135	360	1.53*2.53*0.12
LP7620A-1530-1~3t	1~3t	1500	3000	6	130	300	1.53*3.03*0.12
LP7620A-2020-10t	10t	2000	2000	8	135	410	2.03*2.03*0.12
LP7620A-2030-10t	10t	2000	3000	8	135	600	2.03*3.03*0.12
LP7620A-2040-10t	10t	2000	4000	8	135	760	2.03*4.03*0.12

LP7620NN: Carbon Steel Construction
LP7620NS: Carbon Steel Structural Stainless steel
LP7620SS: Stainless Steel architecture