


MA318

STAINLESS STEEL HOUSING

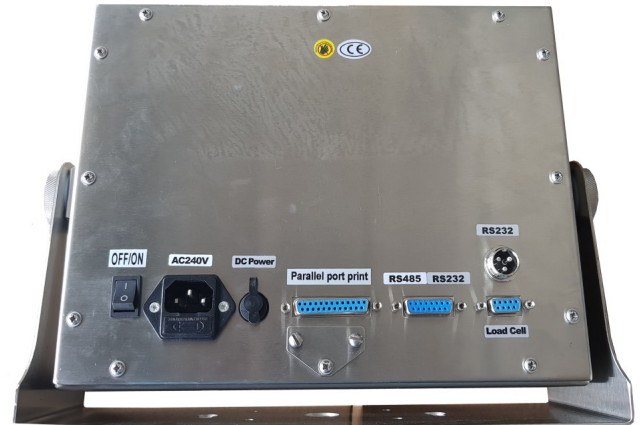

BASIC FUNCTION

- Zero function, zero tracking, initial zero function
- Tare, preset tare function
- 1000 groups of vehicle ID tare weight record
- 1000 groups of weighing record (date, time, vehicle, cargo, net weight, tare weight, gross weight)
- 200 groups of weigh-in record storage (twice weighing)
- Real-time clock, time display
- Printing report
- Recall function
- Overload prompting function

TECHNICAL PARAMETER

- Accuracy class : 6000 e, III
- Resolution: display:30,000 ADC: 2,000,000
- Sensitivity (internal) 0.3mV /d
- Signal range -30~30mV DC
- Excitation circuit 5VDC, Maximum connect 12pcs of 350W load cells
- AC power AC220V
- Battery parameters 12V 7Ah 20hours using digital display height 7 digits LED 20mm
- Keys 5*6 Matrix keyboard
- Product weight 3.6kg
- Shipping weight 6.0kg
- Product size 260*160*80mm
- Packing size 360*350*120mm
- Operation temperature and operation humidity -10°C~+40°C 85%RH
- Storage temperature -40°C ~ +70°C

EXTERNAL PERIPHERAL DEVICES



COMMUNICATION FEATURES

- Printing function (RS232/parallel port)
- Big display function (RS232)
- Computer communication (USB VCP/RS2323/RS485)

