


MCS 500 - 1t

Model	Max	Min	e
MCS 500	500kg	4kg	0.2kg
MCS 1000	1000kg	10kg	0.5kg

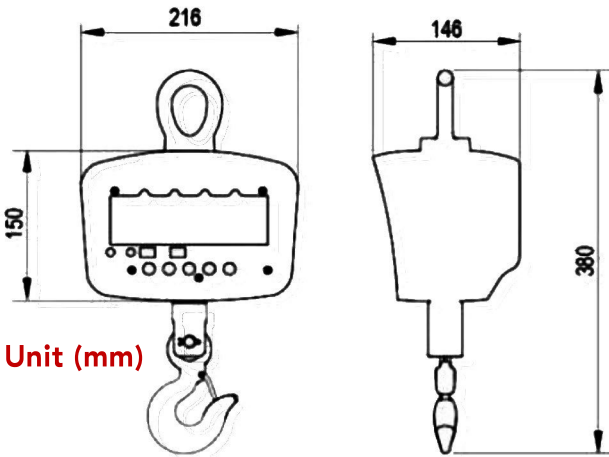

⊕ Technical Parameter

- 30mm LCD display
- Accuracy class: OIML III
- Tare range: 100% F.S.
- Zero range: 2% F.S.
- Safe overload: 120% F.S.
- Ultimate overload: 120% F.S.
- Overload alarm: 100% F.S.+9e
- Battery: 6V 4.5Ah
- Battery life: >80h
- Temperature range: -10°C ~ 40°C
- Adapter: 9V 1200mA

⊕ Features

- Integrated design, ensure weighing accuracy and strength
- Cast aluminium alloy housing, ensure strength
- Surface is treated with shot blasting, spray paint processing, anti-corrosion
- Reinforced alloy steel, ensure overload performance